

UL 1015 CSA TEW


Appliance Wiring Material

Conductor: Solid or stranded concentric tinned copper

Insulation: Color coded PVC insulation

Rated: Temp. 105 oC. Voltage 600 V.Pass UL VW-1 and CSA FT1 vertical flame test
Available colors in red, yellow blue, white , black, green, brown ,orange, purple, grey and pink.

Application: For general purpose internal wiring of electronic and electrical equipment.

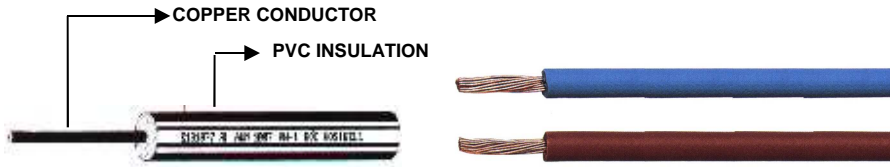

Type	Rating		Conductor			PVC insulation		Part Number
	Voltage V	Temp. °C	Size AWG	Minimum Cross section Area mm ²	Stranding Pcs./mm	Nominal Thickness mm	Nominal OD mm	
1015 TEW SOLID	600	105	26	0.13	1/0.42	0.76	2	101526S
			24	0.2	1/0.52	0.76	2.1	101524S
			22	0.32	1/0.65	0.76	2.35	101522S
			20	0.51	1/0.82	0.76	2.5	101520S
			18	0.81	1/1.10	0.76	2.7	101518S
			16	1.28	1/1.30	0.76	2.9	101516S
			14	2.04	1/1.70	0.76	3.35	101514S
			12	3.24	1/2.10	0.76	3.8	101512S
1015 TEW STRANDED	600	105	26	0.13	7/0.16	0.76	2.1	101526
			24	0.2	11/0.16	0.76	2.2	101524
			22	0.32	17/0.16	0.76	2.45	101522
					7/0.32			
			20	0.51	21/0.18	0.76	2.6	101520
					7/0.32			
			18	0.8	34/0.18	0.76	2.8	101518
					16/0.26			
			16	1.27	26/0.26	0.76	3.1	101516
			14	2.02	41/0.26	0.76	3.6	101514
12	3.24	43/0.32	0.76	4.3	101512			
10	5.1	103/0.26	0.76	5	101510			
		5.16	43/0.40					