


RS 485, RS422 Applications

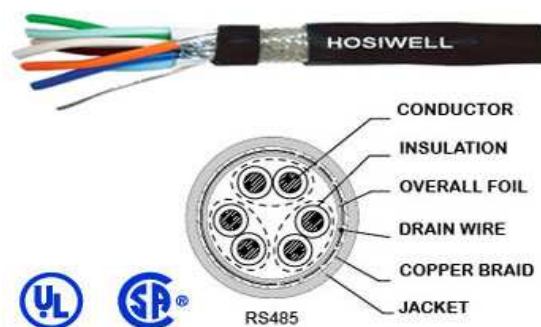

Low capacitance, as 12 pf/ft, twisted pairs with shield
 100 Ohms +/-20% Impedance
 UL type CM CSA PCC
 75°C, 300 Volt

Product Description

1 Pairs 22 AWG with Foil and Copper Braid Shield

Part number	Type	Conductor		Insulation Material	Braid shield		Jacket Material	Nominal O.D.	Nominal Cap. Pf/m.
		No/mm.	Material		No/mm.	Material			
P/N94851B	UL CM	7/0.254x2 22 AWG	TC	FPEO.72 White,blue	16/7/0.12	TC Braid	Black PVC	7.0	40

