


# RS 485, RS422 Applications

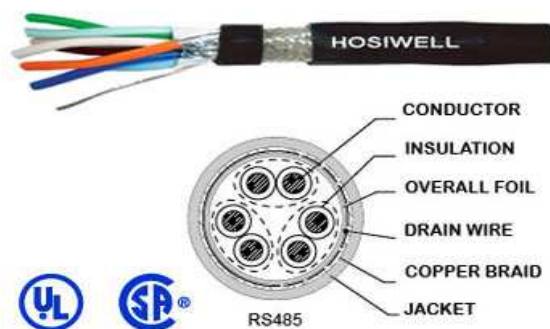

Low capacitance, as 12 pf/ft, twisted pairs with shield  
 100 Ohms +/-20% Impedance  
 UL type CM CSA PCC  
 75°C, 300 Volt

## Product Description

2 Pairs 22 AWG with individual Foil and Copper Braid Shield

Part number	Type	Conductor		Insulation Material	Braid shield		Jacket Material	Nominal O.D.	Nominal Cap. Pf/m.
		No/mm.	Material		No/mm.	Material			
P/N94852B	2 pairs	7/0.254	TC	FPE 0.72	16/7/0.12	TC Braid	Black PVC	10.98	40

