


RS 485, RS422 Applications

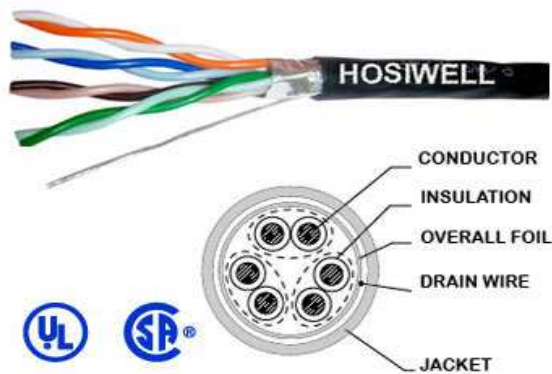

Low capacitance, as 12 pf/ft, twisted pairs with shield
 100 Ohms +/-20% Impedance
 UL type CM CSA PCC
 75°C, 300 Volt

Product Description

4 Pairs 22 AWG with individual Foil Shield

Part number	Type	Conductor		Insulation Material	Braid shield		Jacket Material	Nominal O.D.	Nominal Cap. Pf/m.
		No/mm.	Material		No/mm.	Material			
P/N94854F	4 pairs	7/0.254	TC	FPE 0.72	-	Foil	Black PVC	12.00	40

