


# Fiber Optic Cabling System

## Simplex Indoor Cable (SXC)

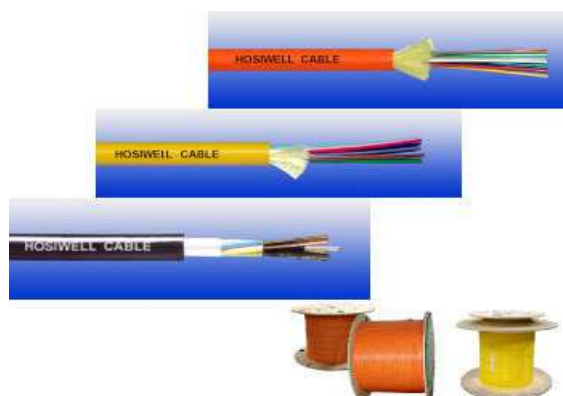

### Product Description

1 fiber,  $\Phi 900\mu\text{m}$ , Tight buffer fiber, Aramid yarn, PVC or LSZH Jacket

### Product Standard

YD/T 1258.4-2005, ICEA-596, GR-409, IEC 794

Part Number	Description
41002-II-05-V	Tight buffer 50/125 OM2 fiber, $\Phi 2.0\text{mm}$ , Simplex, PVC jacket.
41002-II-05a-V	Tight buffer 50/125 OM3 fiber, $\Phi 2.0\text{mm}$ , Simplex, PVC jacket.
41002-II-05-Z	Tight buffer 50/125 OM2 fiber, $\Phi 2.0\text{mm}$ , Simplex, LSZH jacket.
41002-II-05aZ	Tight buffer 50/125 OM3 fiber, $\Phi 2.0\text{mm}$ , Simplex, LSZH jacket.
41002-III-05-V	Tight buffer 50/125 OM2 fiber, $\Phi 2.8\text{mm}$ , Simplex, PVC jacket.
41002-III-05a-V	Tight buffer 50/125 OM3 fiber, $\Phi 2.8\text{mm}$ , Simplex, PVC jacket.
41002-III-05-Z	Tight buffer 50/125 OM2 fiber, $\Phi 2.8\text{mm}$ , Simplex, LSZH jacket.
41002-III-05a-Z	Tight buffer 50/125 OM3 fiber, $\Phi 2.8\text{mm}$ , Simplex, LSZH jacket.

06 means OM1 62.5/125 $\mu\text{m}$ ; 05 means OM2 50/125 $\mu\text{m}$ ;  
05a means OM3 50/125 $\mu\text{m}$ ; 09 means OS1 9/125 $\mu\text{m}$ )

