


Fiber Optic Cabling System

Unitube Light-armored Cable (GYXTW)

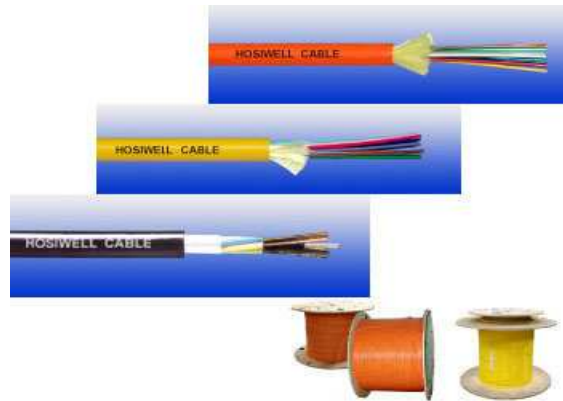

Product Description

The fibers, 250 μ m, are positioned in a loose tube made of a high modulus plastic. The tube is filled with a water-resistant filling compound. The tube is wrapped with a layer of PSP longitudinally. Between the PSP and the loose tube water-blocking material is applied to keep the cable compact and watertight. Two parallel steel wires are placed at the two sides of the steel tape. The cable is completed with a polyethylene (PE) sheath.

Application : Duct/Aerial.

Product Standard : YD/T 769-2003

Part Number	Description
41008-NN-05	Loose tube 50/125 OM2 fiber, Unitube light-armored, PE Jacket
41008-NN-05a	Loose tube 50/125 OM3 fiber, Unitube light-armored, PE Jacket

NN: Fiber Counts, 02 means 2 fibers, 12 means 12 fiber, 06 means OM1 62.5/125 μ m; 05 means OM2 50/125 μ m; 09 means OS1 9/125 μ m

