


RevNo	Revision note	Date
△		
△		
△		

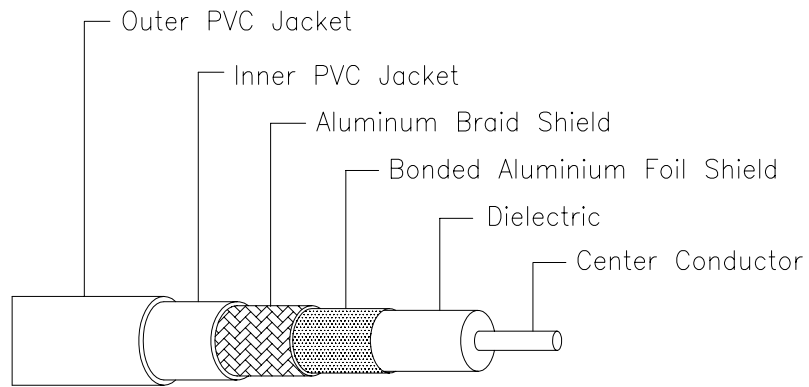

ELECTRICAL PROPERTIES :

Impedance : 75.0 ±3.0 Ohms
 Velocity of propagation : 85.0% Nominal
 Capacitance Conductor to Shield : 16.2 pF/ft (53.1 pF/m) Nominal

ATTENUATION : @ 68 °F (20 °C)

CONSTRUCTION DETAILS

CENTER CONDUCTOR :

18AWG Copper-Clad Steel
 Nominal Diameter 0.040" (1.02 mm)

DIELECTRIC :

Gas Expanded Polyethylene
 Nominal Diameter Over Dielectric : 0.180" (4.57 mm)

SHIELD :

1st Shield : Aluminum-Polyprorylene-Aluminum
 Laminated Tape with Overlap Bonded to the Dielectric
 Nominal Diamiter Over Tape : 0.186" (4.72 mm)
 2nd Shield : Aluminum Braid Wire 90% Coverage

INNER JACKET : PVC


Nominal Diameter Over Jacket : 0.272" (6.91 mm)
 Nominal Jacket Thickness : 0.030" (0.77 mm)

OUTER JACKET : PVC

Nominal Diameter Over Jacket : 0.338" (8.60 mm)
 Nominal Jacket Thickness : 0.033" (0.85 mm)

LISTING AND RATINGS : UL TYPE CATV

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.57 dB	1.87 dB
55 MHz	1.50 dB	4.94 dB
211 MHz	2.87 dB	9.43 dB
250 MHz	3.12 dB	10.22 dB
270 MHz	3.24 dB	10.63 dB
300 MHz	3.43 dB	11.25 dB
330 MHz	3.61 dB	11.84 dB
350 MHz	3.72 dB	12.20 dB
400 MHz	4.00 dB	13.12 dB
450 MHz	4.28 dB	14.04 dB
500 MHz	4.51 dB	14.80 dB
550 MHz	4.76 dB	15.62 dB
600 MHz	4.98 dB	16.34 dB
750 MHz	5.62 dB	18.44 dB
870 MHz	6.09 dB	19.99 dB
1000 MHz	6.54 dB	21.46 dB

Designed by - date	Checked by - date	Approved by - date	Date 12/02/2010	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name CATV/MATV Coaxial Drop Cable	Unit -	
			Part No. C-RG6/S90-D	Issued 1	
			Ref. No.	Sheet 1 of 1	
			Used On.		